




IR103C, IR104C, IR105C Apartment Intercom Stations Specification Sheet

IL486
Section A
Rev. 8-06/2001

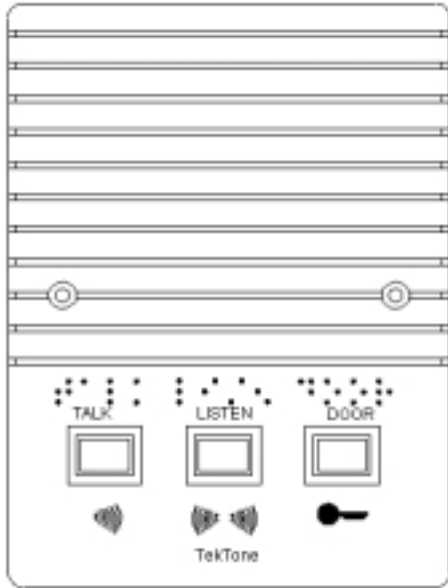

IR103C/IR104C/IR105C

ARCHITECTS' AND ENGINEERS' SPECIFICATION

Suite stations shall be TekTone®'s IR103C, IR104C, or IR105C. The stations shall be equipped with momentary-action push buttons for **TALK**, **LISTEN** and **DOOR** operation. Buttons shall be labeled in English, and with both international and Braille symbols. The speaker/microphone shall be a 3-1/2" high-sensitivity type with voice-frequency response. The station shall have an attractive, flame retardant type ABS plastic faceplate with screw terminal connections.

Required wiring shall be only 2 common and 1 selective wires for the IR103C station; 3 common and 1 selective wires for the IR104C station; and 4 common and 1 selective wires for the IR105C station.

FEATURES

The IR103C/IR104C/IR105C Apartment Intercom Stations combine modern styling with ease of operation to provide natural, clear voice communication and positive door-release operation. The attractive, flame retardant type ABS plastic faceplates are flush mounted and blend with any setting. The advanced circuitry and versatility permit use in large or small buildings, with one or several entrances.

A wide variety of optional accessories is available to provide additional functions, such as multiple entrance operation and post office door release.

- Flush mounting
- Simple, push button operation
- Easy installation
- Advanced design
- Automatic privacy
- Clear voice quality
- Precision-engineered for reliability
- English text, international symbols and Braille

SPECIFICATIONS

Dimensions:	Height:	6-7/8" (175mm)
	Width:	5" (127mm)
	Depth:	1-1/2" (38mm)
	Projects:	1/2" (13mm) from mounting surface
Finish:	Attractive, flame retardant type ABS plastic.	
Controls:	Individually replaceable push buttons with self-wiping contacts. Identified for TALK , LISTEN and DOOR functions.	
Speaker/Mic:	3-1/2" (89 mm) with voice response. Also used for electronic tone signal.	
Connection:	Screw terminals standard.	
Housings:	IH102 ring or IH101 box.	

REQUIRED COMPONENTS

AM/CM Series	Entrance Panels
PK543	Amplifier
SS Series	Transformers