

ADJUSTABLE STRIKE 2012

APPLICATION

For use in new or replacement, aluminum or hollow metal jamb installations with locksets having up to **5/8" throw.***

For Radius Corners add "RD" to model #

FEATURES

- FACE PLATE – 1-1/4" X 4-7/8"
- 1/8" HORIZONTAL LATCH ADJUSTMENT
- REMOVABLE LATCH GUARD
- SOLID CAST LATCH – Chrome Plated
Cavity Depth - 9/16"; Max. Width - 5/8";
Length - 1-11/16"
- STEEL OR ALUMINUM FACE PLATE AVAILABLE
- RELEASES UNDER DOOR PRELOAD
- DURABILITY – 500,000 Life cycles
- HOLDING FORCE – 900 lbs.
- NON-HANDED
- MORTISE TYPE – Backset 1-1/2" Deep
- CORROSION RESISTANT – Face Plate, Latch
and Mechanism
- FAIL SECURE (Standard Action)

STANDARDS

- ANSI – 1-1/4" X 4-7/8" Fits Cutout Specification
A115.1 (with slight jamb modification)
- BHMA 156.5 – 1992

FINISH (Specify When Ordering)

- BRASS – Powder Coated (2012)
- SATIN ALUMINUM – US28 (2012A)
- BRIGHT CHROME – US26 (2012C)
- SATIN BRONZE – US10 (2012SB)

ELECTRICAL CHARACTERISTIC CHART**

Four Magnetic Coils Available

FAIL SECURE NORMALLY LOCKED (Unlocked when energized)

| VOLTAGE | CURRENT AMPS | OHMS | SOUND | DUTY |
|-----------|-----------------|------|--------|-------------|
| 6-14 VAC | .300-.700 | 13 | Buzz | Intm. |
| 6-14 VDC | .350-.850 | 13 | Silent | Intm. |
| 16-24 VAC | .230-.375 | 47 | Buzz | Intm. |
| 16-24 VDC | .325-.500 | 47 | Silent | Intm. |
| 12 DC | .200 | 60 | Silent | Intm./Cont. |
| 24 DC | .110 | 220 | Silent | Intm./Cont. |

ADJUST THE STRIKE NOT THE DOOR

FAIL SAFE (Reverse Action) NORMALLY UNLOCKED (2012RS)
(Locked When Energized) Continuous Duty DC Coil which is energized for
longer than one minute. Add RS to catalog number when ordering

| VOLTAGE | CURRENT AMPS | OHMS | SOUND | DUTY |
|---------|-----------------|------|--------|-------------|
| 12 DC | .200 | 60 | Silent | Intm./Cont. |
| 24 DC | .110 | 220 | Silent | Intm./Cont. |


*5/8" Throw based on 1/8" door gap.

**Specify voltage when ordering

COMPATIBLE LOCKSETS

| | |
|-----------|-------------------------|
| ACCURATE | 62,66,69 |
| ADAMSRITE | 4700-8300, 8400 |
| ARROW | C, H, M, L |
| BEST | 5, 7, 50, 6TDL |
| CORBIN | 1400-5600, 6100-6600 |
| DEXTER | DEXLOCK, DURALOCK |
| DOMINION | 300, 400, 5000 |
| GUARD | 1990 |
| FALCON | A, BA, D, E, F, N, S, X |
| HARLOC | 49/5900, 6900 |
| KWIKSET | 400, 500, 582, 583 |
| LOCKWOOD | 930/970, 8000 |
| LORI | 80/8200, 81/8300, |
| LSDA | 1000-1500, 100-150 |
| MARKS | 110, 180, 8000-9000 |
| MEDECO | EMBASSY |
| NATIONAL | 400 |
| PDQ | SH, SR, SV, SX |
| PARKER | 160A, 9100, L7100, 2800 |
| RUSSWIN | 3400-4300 |
| SARGENT | 6, 7, 8, 9, 10 |
| SCHLAGE | A, F |
| TACO | ED, HV, LXV, SV, MLV |
| TAYMOR | 28 |
| UNICAN | 6000, 7004 |
| WEISER | A, BA, D, E |
| WESLOCK | ALL LOCKS |
| YALE | 5200, 5300 |

NOTE: Compatible lockset designations are offered as a convenience only; reference should be made to manufacturers catalogs for complete data as to exact requirements. Caution must be taken in the alignment of locks with latchbolts when used with an electric strike. The spacing between the door and door jamb varies. If the gap is exceptionally tight, the latchbolt may not project to its maximum length. Trine Products Company, assumes no liability for differences between items compared.

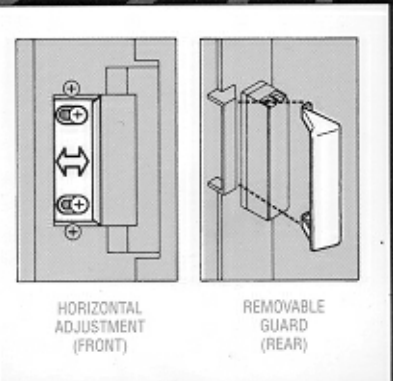

2012