

# CSP-20

## ANALOG, SCREEN SPLITTER




### KEY FEATURES:

- Industrial grade specifications
- Requires only one genlockable camera
- Made in the USA
- Color or B&W cameras
- UL listed Power Supply

The **CSP-20** is a 2 input, Color screen splitter that provides an unlimited split variations. The position and size of the split / window is electronically variable and the **CSP-20** requires at least 1 genlockable Color or B&W camera.

## SPECIFICATIONS

Video:		External Controls:	
Inputs:	2x Composite Video		A Only, Split, B Only, Switch
Input Connectors:	BNC (3x)	Power Requirements:	
Input Level:	1VPP	AC Operation:	Use CV-12E Adapter
Input Impedance:	75ohm +/-5% B INPUT		Supplied With Unit
	24K ohm +/-5% A INPUT	AC Power:	120VAC +10% / -15% / 60Hz
Outputs:	1x	AC Power Draw:	<4w
Output Connectors:	BNC	Power Connector:	3.5mm Phono Plug
Output Impedance:	75ohm +/-5%	Mechanical:	
Gain In/Out:	Unity	Size:	8.0W x 8.5D x 1.65H
Gain Inequity CHA/CHB:	+/-5%	Weight:	1.5lbs.
Internal Controls:			
	H Window Start		
	H Window End		
	V Window Start		
	V Window End		

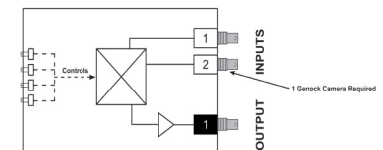

**P.O. Box 749**  
**Peekskill, NY 10566**  
**Phone: (845) 737-7009**  
**Fax: (845) 737-0426**  
**www.compuvideosystems.com**

**All Specifications Subject To Change Without Prior Notification**