

# CTS-8

## SEQUENTIAL, VIDEO SWITCHER




### KEY FEATURES:

- High quality Video Performance
- UL listed power supply
- Looping/Terminating: CLTS-8, CLS-8
- High quality Construction
- Terminating: CTS-8
- Made in USA

The **CTS-8** is a high performance 8x1 composite video sequential switcher. The switcher is designed to handle up to eight high resolution color video sources and uses an external UL listed power supply to meet today's safety requirements. Switching occurs during the vertical interval to minimize monitor roll. Designed with advanced technology, the CTS line of switchers are extremely reliable and can serve as the heart of any video system.

## SPECIFICATIONS

Video:		Power Requirements:	
Input Impedance:	75 ohms Terminated	Power:	UL Listed 12VDC Power
Output Impedance:	75 ohms		Adapter (Supplied)
Max Video Input:	2vpp	Input Voltage:	12 To 18VDC Isolated
Frequency Response:	15mHz +/- 0.7dB		Ground
Gain:	Unity +/-3%	Power Consumption:	1 Watt
Differential Gain:	<0.5%	Mechanical:	
Differential Phase Error:	<0.5 Degrees	Connectors:	BNC
Max H Tilt:	<1%	Power Connector:	3.5mm Phono, Center +
Max V Tilt:	<1%	Height:	1.70"
Operational		Width:	8.70"
Switches (8):	3 Position Toggle Switch	Depth:	8.00"
Indicators (8):	LED Lamp For Each Input		
Sequence Interval:	Variable 1 sec. To 90 sec.		

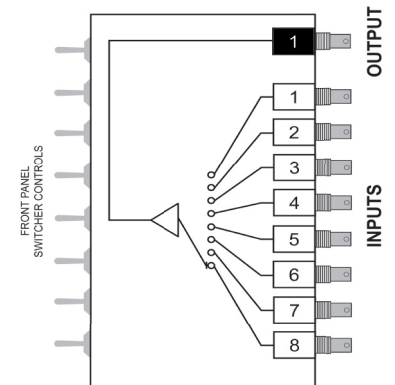

P.O. Box 749  
 Peekskill, NY 10566  
 Phone: (845) 737-7009  
 Fax: (845) 737-0426  
[www.compuvideosystems.com](http://www.compuvideosystems.com)

**All Specifications Subject To Change Without Prior Notification**