

## IR Day/Night Color Weatherproof Cameras


- ▶ 12 or 24 LEDs
- ▶ 40' or 80' Range
- ▶ IP67 for Outdoor Use
- ▶ Low Power Consumption



Model	Lens	Angle	LEDs
EV-132C-DW2	2.9mm	120°	12
EV-1323C12DW	4.3mm	78°	12
EV-132C-DWL6Q	6.0mm	53°	24
EV-132C-DWL8	8.0mm	39°	24
EV-132C-DWLD	12.0mm	26°	24
EV-132C-DWLH	16.0mm	19°	24

Viewing angles are approximate

SECO-LARM's IR Day/Night Color Cameras with 12 IR LEDs for up to 40' range or 24 IR LEDs for up to 80' range incorporate the Sony CCD to provide a clear picture and outstanding resolution (420 TV lines) at a very low lux (0.1 lux LED off, 0 lux LED on). They combine a rugged die-cast aluminum construction with a unique weatherproof (IP67) design and sunscreen for indoor or outdoor use.

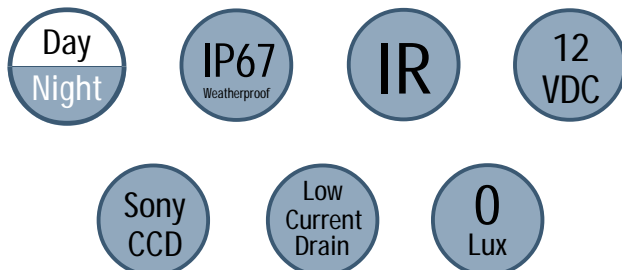

### Technical Specifications:

	12 LED Cameras	24 LED Cameras
Infrared Illumination	Up to 40'	Up to 80'
Current consumption	60mA (LED off) 160mA (LED on)	90mA (LED off) 290mA (LED on)
Chip	1/3" CCD, Sony	
S/N ratio	50dB (AGC off)	
Resolution	420 TV lines horizontal	
Pickup elements	512 x 492 pixels	
Scanning system	Interlace 2:1	
Sync	Internal	
Video output	1 Vp-p composite output, 75 ohms	
Minimum illumination	0.1 lux (LED off), 0 lux (LED on)	
Backlight compensation	Auto	
Shutter control	Auto, 1/60~1/100,000 sec.	
Gain control	Auto	
Gamma correction	0.45	
White balance	Auto	
Power source	12VDC ±10%	
Enclosure	IP67 Weatherproof	
Ambient temperature	14°~131° F (-10°~55° C)	
Dimensions	3 1/16" (L) x 2 1/4" (D) (78 x 57 mm)	
Sunscreen & Bracket	Included	

Copyright 2007 SECO-LARM U.S.A., Inc. Allrights reserved.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.