

ELECTRIC STRIKE 1001-2

APPLICATION

For use in new or replacement installations in wood and metal jambs. For use with locksets having up to 5/8" throw.*

Upgrade for model 001 in low current conditions

FEATURES

- FACE PLATE – 1-1/4" X 5-7/8"
- DURABILITY – 500,000 Life cycles
- HOLDING FORCE – 1000 lbs.
- RELEASES UNDER DOOR PRELOAD
- NARROW STYLE – Face Plate 1-1/4" Wide
- HEAVY DUTY ARMATURE
- HEAVY DUTY LATCH SPRING
- SCREW TERMINALS – For Quick Connection
- CORROSION RESISTANT – Face Plate and Latch
- SOLID CAST LATCH – Chrome Plated
Cavity Depth - 9/16"; Width - 9/16";
Height - 1-11/16"
- NON-HANDED
- MORTISE TYPE – Backset 1-7/16" Deep
- FAIL-SECURE – (Standard Action) Unlocks
When Energized

FINISH (Specify When Ordering)

- BRASS – Powder Coated - (1001-2B)
- SATIN CHROME – US26D (1001-2C)

ELECTRICAL CHARACTERISTIC CHART**

Two Magnetic Coils Available

FAIL SECURE NORMALLY LOCKED (Unlocked when energized)

VOLTAGE	CURRENT AMPS	OHMS	SOUND	DUTY
6-12 VAC	.495-1.09	5.2	Buzz	Intm
6-12 VDC	.650-1.24	5.2	Silent	Intm
14-24 VAC	.27-.48	37.0	Buzz	Intm
14-24 VDC	.38-.61	37.0	Silent	Intm


*5/8" Throw based on 1/8" door gap.

**Specify voltage when ordering

COMPATIBLE LOCKSETS

ACCURATE	66
ARROW	C, H, M
BEST	5, 7, 50, 6TDL
CORBIN	1400-5600, 6100-6600
DEXTER	DEXLOCK, DURALOCK
DOMINION	300, 400, 5000
GUARD	1990
FALCON	A, BA, D, E, F, N, S
HARLOC	49/5900, 6900
KWIKSET	400-500, 582, 583
LOCKWOOD	900
LORI	80/8200, 81/8300
LSDA	1000-1500, 100-150
MARKS	110
NATIONAL	400
PDQ	SR, SV, SX
PARKER	160A
RUSSWIN	3400, 4300
SARGENT	6, 7, 8, 9, 10
SCHLAGE	A, F
TACO	ED, HV, LXV, SV
TAYMOR	28
UNICAN	6000, 7004
WEISER	A, BA, D, E
WESLOCK	ALL LOCKS
YALE	5200, 5300

NOTE: Compatible lockset designations are offered as a convenience only; reference should be made to manufacturers catalogs for complete data as to exact requirements. Caution must be taken in the alignment of locks with latchbolts when used with an electric strike. The spacing between the door and door jamb varies. If the gap is exceptionally tight, the latchbolt may not project to its maximum length. Trine Products Company, assumes no liability for differences between items compared.

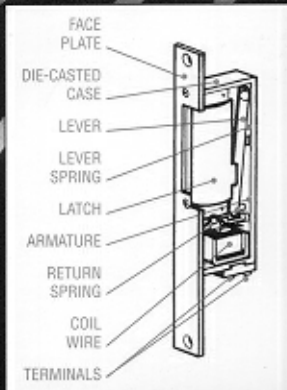

1001-2